



# SHARED EXPERIENCE

Courant is a family owned rope manufacturing company passed down from generation to generation, where our knowledge and expertise goes back almost 200 years. In order to offer great quality ropes, we have developed and constructed different inhouse testing machines to reproduce the conditions found in actual work environments. All ropes must pass rigorous test procedures to ensure that each user gets the most effective and durable rope for his specific use.

Our R&D team consists of highly experienced and innovative individuals working to meet the constantly evolving requirements of the arborist, access & rescue industry. Therefore they are considered to be the actual heart of the rope manufacturing process within our company.

# WE BUILD CONNECTIONS WITH PEOPLE WORKING ON ROPES

In the last few years we have developed a full range of tree climbing equipment for the professional arborist, combining high levels of functionality, comfort and durability. Following this we started working with a determined group of international ambassadors and product testers who assisted us in the development process, to make sure each product meets (or preferably exceeds) the expectations of the market.

All this hasn't gone unnoticed by worldwide users, reflected by increasing demand from Arb suppliers all over the globe. At Courant we are fully committed to further expand our business in the next few years, by forging long term relationships with the right people, who like us; are passionate about building connections and supplying the best tree climbing equipment.





# USERS ARE KEY IN OUR DEVELOPMENT PROCESS



#### **MEETIC TECHNOLOGY**

The patented Meetic Technology creates a real connection between the core and the sheath of a rope for 'ultimate' safety! It allows a safe escape in worse case scenarios and/or severe sheath damage. Using heat treatment we can 100% eliminate the use of glue so our rope will not lose its flexibility over time.



#### X-BRAID

Each rope core consists of multiple braided cores instead of the more commonly used core with twisted strands of yarn. The X-Braid Technology ensures a long-lasting flexibility to all the ropes carrying this specific marking.



#### **MADE IN FRANCE**

A few kilometres away from the original 19th century rope production location, our ropes are 100% made in Angers, Loire valley, France!



#### **COURANT LEMON LAB**

Creating remarkable ropes is a much tougher job than just producing ropes which meet the standards. Recently our R&D team have developed and constructed a rope testing machine to imitate the rope behavior during heavy use in tough environments. This allows us to reproduce the actual wear on a rope and the results from these tests are used in the development process. Which finally leads to a more wear resistant rope while keeping its suppleness and flexibility.

# **COURANTS STRENGTHS**

# COURANT GIVING BACK



#### **KOALA: AUSTRALIA**

When we saw the ecological devastation caused by the Australian bush fires, we wanted to help. The company management decided to donate a portion of the profits from the sale of our Koala harness in 2020. This money goes towards the rehabilitation of the animals who have survived these terrible fires, and also towards the reconstruction of the devastated areas.

## VIRADES DE L'ESPOIR



The Virades de l'Espoir is a national event organized by volunteers to promote public awareness and to fundraise for the cystic fibrosis association. This event has run for over 30 years. Courant have been supporting this cause for the past 4 years by providing a climbing wall for their annual event.



#### PINK DRAGON LADIES

The Pink Dragon Ladies are survivors of breast cancer who have come together to crew the Dragon boat. Through this group they not only are physically active, but they also have a solidarity and shared unity in their fight against cancer. We have supported these fantastic ladies for several years.

# TREE CLIMBING EQUIPMENT

Climbing Harness	P. 10-11
Harness accessories	P. 12-15
Climbing ropes	P. 16-19
Access ropes	P. 20-21
Hitch cords & slings	P. 22-23
Anchoring & slings	P. 24-25
Wire core lanyards	P. 26-27
Flexible lanyards	P. 28-29
Throw lines & bags	P. 30-31
Hardware	P. 32-36
Platform safety kit	P. 36-37

# **TRANSPORT & STORAGE BAGS**

Bags P. 38-45

# **LOWERING & RIGGING EQUIPMENT**

Lowering device P. 46-49
Rigging ropes & slings P. 50-51
Rigging pulleys P. 52-53
Hauling kit & flash code beacons P. 54-55

# CLIMB

# **HARNESS**

# **KOALA**







# **KOALA**

#### **COMFORTABLE & LIGHTWEIGHT**

When you want comfort but won't compromise on features or functionality the Koala is the harness for you. The waist and leg padding are manufactured from a blend of foams, which offer unrivalled comfort and excellent breathability. This easy to adjust harness has been designed for maximum performance in the trees and comes in 3 sizes to fit each individual.

#### **KEY FEATURES**

- Available in 3 sizes; S, M/L and L/XL
- Improved leg padding for increased comfort
- · Upgraded attachment bridge with wear indicator
- New chest harness can be added to comfortably carry heavy chainsaws

#### OTHER FEATURES

- No compromise between lightness and comfort
- Austri-Alpin stainless steel Cobra® buckles • Openable rings to allow bridge
- replacement • Rapid adjustment for instant comfort
- Generous number of gear loops
- Extra loop on the rear to accommodate the chest harness

#### Size S

- Waist: 60cm 100cm • Thigh: 55cm - 85cm
- · Weight: 1.5kg
- Reference: RELOHRS+

#### Size M/L • Waist: 75cm - 105cm

• Thigh: 60cm - 50cm • Weight: 1.6kg Reference: RELOHRML+

#### Size L/XL

- Waist: 95m 120cm • Thigh: 70cm - 102cm
- Weight: 1.7kg
- Reference: RELOHRXL+
- Certification: CE EN358 & EN813

# **ODIN**

#### **A KING'S TOOL**

After 3 years of constant fine tuning we are proud to announce the new version of the Olik openable ring which answers to the name; Odin! It is made from high resistant stainless steel and the size and certification allows the connection of a large number of pieces of equipment in different sizes and setups. It opens like a normal karabiner but in a sideways direction, and together with the specially designed keylock gate it assures minimal force is applied to the locking screw. The screw has a spring ball system with a thread lock to securely fix the gate before use.

#### **Certification: CE EN362**


- Outside diameter: 75mm
- Inside diameter: 47mm
- Gate opening: 18mm
- Weight: 130gram • Static resistance: 25kN

Reference: RMQXANOD













# **KOALA CHEST**

#### **TAKE A LOAD OFF**

The new chest harness is manufactured from perforated foam and soft fabrics which make it very comfortable and highly breathable. It helps to redistribute the weight of heavy tools and increase comfort while climbing. The different loops facilitate the attachment of equipment, accessories or your SRT climbing system.

Three karabiners attach the chest to the Koala harness and four adjustment points will give you an optimum fit. The Koala chest is also compatible with other climbing harnesses currently on the market.

Reference: RELOTHKA

#### One size fits all

- Colour: black / green
- Dimensions: 490mm x 565mm
- Weight: 0.7kg

# MILLO

#### **BUILDING BRIDGES**

The bridge gets more wear than any other part of a climbing harness, therefore we decided to increase the diameter of our bridge and incorporate a red wear indicator. This unique feature alerts you when it is time to replace your bridge. It is available in three lengths and two colour combinations for easy recognition of the primary and secondary bridge.

#### Sizes

#### 25 cm

- Diameter: 11mm
- Length: 25cm · Weight: 0.05kg

## Reference:

RELOPS25+ (Primary) RELOPA25+ (Secondary) 30cm

- Diameter: 11mm
- Length: 30cm • Weight: 0.06kg
- Reference: RELOPS30+ (Primary)

#### 35cm

- Diameter: 11mm
- Length: 35cmWeight: 0.07kg
- Reference:

RELOPS35+ (Primary) RELOPA35+ (Secondary)

RELOPA30+ (Secondary)

Certification: as fixed part of the Koala harness











# SK8

#### **TAKE A SEAT MY FRIEND**

The SK8 is a Canadian built compact and lightweight shaped maple wood seat, which comes in 2 sizes. It is quick and easy to attach to the Koala harness, but also compatible with most arborist harnesses currently on the market.

Its design and lightness make the seat very comfortable to use and doesn't impair your movement through the trees. Three gear loops allow tools to be attached to the underside.

#### Size M/L

- Length: 49cm
- Width: 14cm
- · Weight: 450gram Reference: RELOSLML+

#### Size L/XL

- Length: 54cm
- Width: 14cm
- Weight: 500gram Reference: RELOSLXL+

# **HONOS**

#### **CARRY YOUR FAVORITE TOOLS**

Our new Honos tool holder has been developed in close cooperation with professional Arborists. It is lightweight but tough and strong enough to carry a chainsaw. By incorporating a locking system, the Honos is designed to stay securely in place on your harness. Available in two different sizes and three eye catching colours, they are sure to stand out.

#### **KEY FEATURES**

- Excellent stability on the harness thanks to the spring lock
- · Locking mechanism on the gate prevents accidental opening

- · Connection hole at the bottom to connect your chainsaw lanyard Size S
- · Secured to the harness by two opposing hooks

#### Size L

- Length: 150mm
- Width: 93mm
- · Gate opening: 42mm
- Weight: 82gram
- WLL: 15kg

#### Reference: Yellow: RMQHONLJ Blue: RMQHONLB Red: RMQHONLR

#### Size S

- · Length: 112mm
- Width: 65mm
- Gate opening: 30mm
- Weight: 35gram
- WLL: 5kg

#### Reference:

Yellow: RMQHONSJ Blue: RMQHONSB Red: RMOHONSR

# **ATOLL**

#### **PUT A RING ON IT**

The Atoll is an aerospace grade aluminium ring to be mounted on the bridge of the Koala harness. It facilitates easy attachment of climbing systems to your harness. The Atoll is available in 2 sizes and are individually marked.

#### Size S

- External diameter: 51mm
- Internal diameter: 27mm
- Weight: 36gram
- Static resistance: 25kN

Reference: RANI05BKA

#### Size L

- External diameter: 70mm • Internal diameter: 45mm
- · Weight: 53gram
- Static resistance: 25kN Reference: RANIO4FLA

Certification: as fixed part of the Koala harness


# **FIRST AID KIT**

This kit is both lightweight and compact and contains all the essentials you will need to effectively deal with an emergency while working in the trees. The kit is designed to be mounted onto the Koala harness, but it is also compatible with other climbing harnesses. All the loose items are attached to the kit bag by an elasticated cord, ensuring nothing falls to the ground when you need it most.

#### Contents

- · Haemostatic dressing
- · Trauma shears
- Tourniquet Felt pen

Reference: RELOTRSE

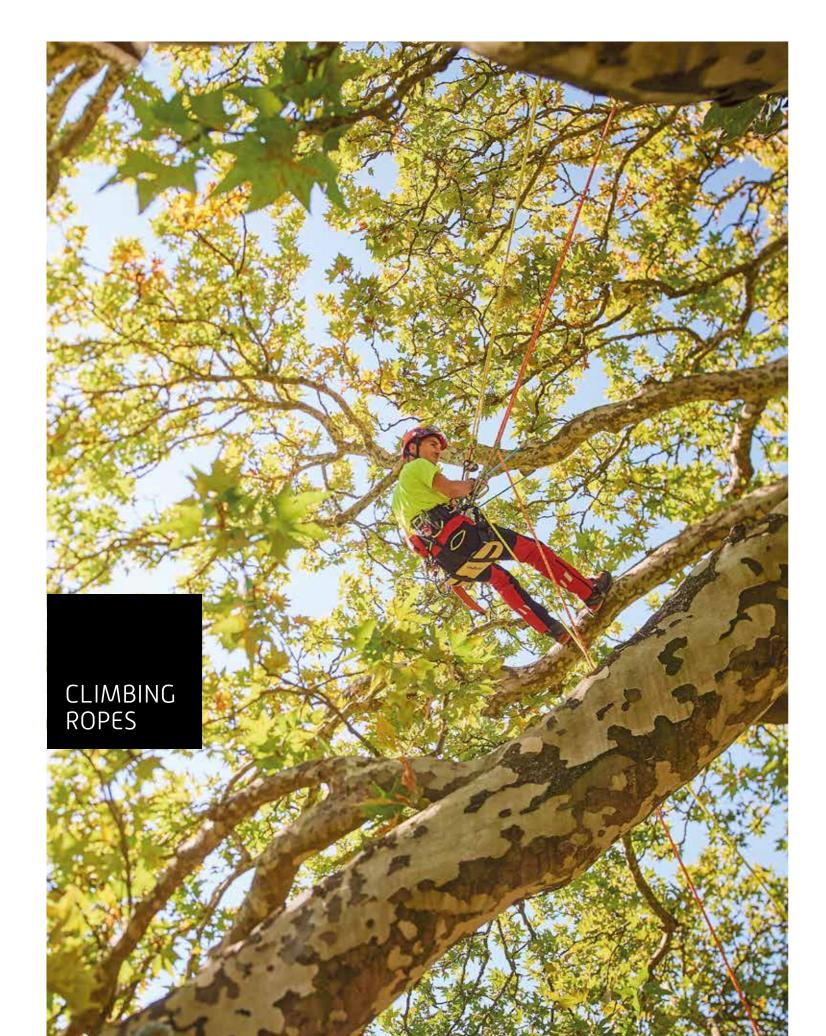





















# **KANOPA**

#### **DON'T CHANGE A GOOD RECIPE**

Developed back in 2009 the Kanopa quickly became the most popular 16-strand climbing rope used by French arborists and it is still widely used today. This 12.1mm diameter rope utilises the X-Braid parallel core technology which gives it it's long-lasting flexibility, where this construction guarantees almost zero core-sheath slippage. In 2019 we introduced a new vibrant colour combination to further enhance its visibility in the trees. Available in different lengths with one or two eye splices.

- Diameter: 12.1mm
- Materials / construction: 16-strand Polyester sheath with X-Braid Polyamide core
- Static resistance: 31kN
- Resistance with spliced eye: 23.5kN
  Mass per meter: 103gram
- Sheath percentage: 67%
- Sheath slippage: 0.4% • Elongation 50 / 150Kg: 2.4%
- Knotability: 0.87 • Retraction with water: 2.8%

Reference: MHF++BZ++++

Certification: CE EN1891-A

# **KOMORA**

#### **DARWIN WAS RIGHT ABOUT EVOLUTION**

Take the DNA of the Kanopa and let it mutate for a decade... the end result, our new 11.7mm Komora 16-strand climbing rope! This rope has been designed using the very latest innovations in rope manufacturing. Its updated sheath gives superior abrasion resistance and it feeds very smoothly through all popular mechanical friction devices on the market.

Like the Kanopa the core is constructed of X-Braid parallel core technology, it comes with a new slim eye splice which can be easily pulled through mechanical friction devices, and it also features the Courant patented in-eye labelling. Available in different lengths with one or two eye splices.

- Diameter: 11.7mm
- Materials / construction: 16-strand Polyester sheath with X-Braid Polyamide core
- Static resistance: 30kN
- Resistance with spliced eye: 19kN
- Mass per meter: 94gram
- Sheath percentage: 67%
- Sheath slippage: 0% Elongation 50 / 150Kg: 2.7%
- Knotability: 0.8
- Retraction with water: 2.7%

Reference: MJF++CZ++++


Certification: CE EN1891-A

Availability







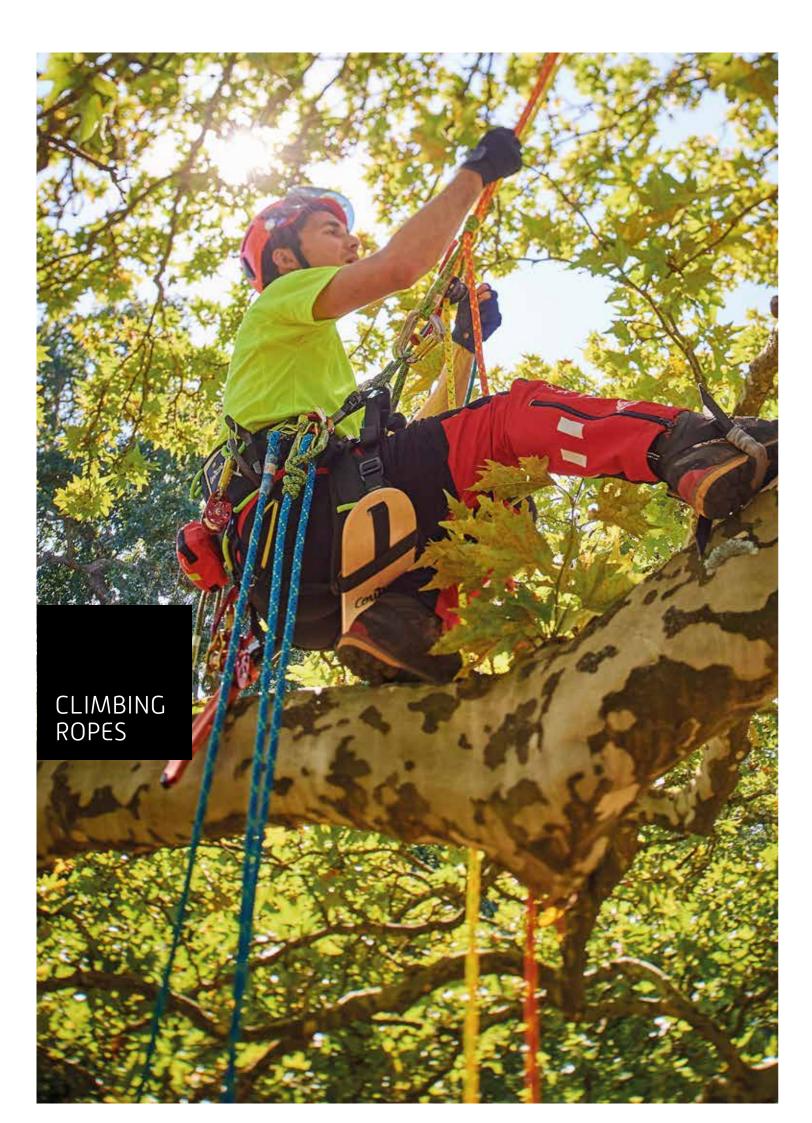




















# **JAPORA**

# **SOFTNESS IS NOT WEAKNESS**

The first 24-strand double braid arborist climbing rope by Courant. Introduced in 2017 and featuring the Courant
patented in-eye labelling.
The soft feel, good grip
and great knot-ability of this 11.5mm diameter rope makes it a very popular choice for many climbers. The ultra slim eye splice can be easily pulled through modern mechanical friction devices. Available in different lengths with one or two eye splices.

- Diameter: 11.5mm
- Materials / construction: 24-strand Polyester sheath with braided Polyamide core
- Static resistance: 23.8kN
- Resistance with spliced eye: 20kN
- Mass per meter: 93gram • Sheath percentage: 59%
- Sheath slippage: 0% Elongation 50 / 150Kg: 3.5%
- Knotability: 0.58
- Retraction with water: 1%

Reference: MJT++JFC+++

Certification: CE EN1891-A

# **OZORA**

#### **THE BIG EASY**

Sharing the same 24-strand double braid construction as the Japora, the Ozora is only Imm bigger in diameter
(12.5mm). Suited to
climbers with slightly
larger hands and searching
for the ultimate grip

Static resistance: ZBKN

Resistance: ZBK on a soft and flexible rope. Available with the patented in-eye labelling system and a slim eye splice.

The Ozora is also compatible with different feedthrough mechanical friction devices. Available in different lengths with one or two eye splices.

- Diameter: 12.5mm
- Materials / construction: 24-strand Polyester sheath with braided Polyamide core
- Static resistance: 26kN
- Resistance with spliced eye: 22kN
   Mass per meter: 109gram

- Retraction with water: 1.2%

Reference: MHT++UCC+++


Certification: CE EN1891-A

Availability







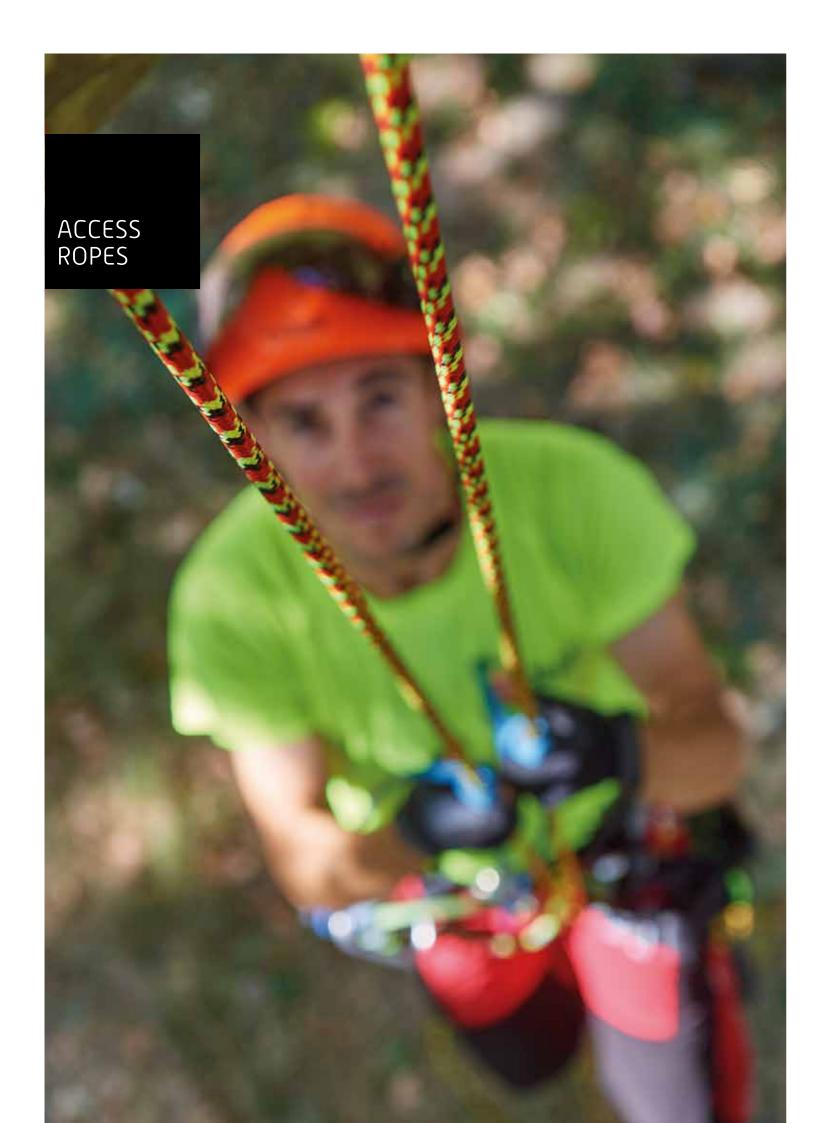







**SQUIR** 











**EXTREMA** 

# **SQUIR**

#### **PUT A WRENCH ON IT**

Designed especially for SRT and/or use as an access line, we have re-developed our low stretch 32-strand 11.5mm diameter Squir rope with a more durable but still flexible sheath. Its low stretch (less than 2% elongation) ensures that the bounce effect is kept to a minimum when ascending the tree. The rope is heat treated in the factory for greater stability, and the sheath protects against wear from sharp toothed cam ascenders. The Squir retains its roundness while descending.

Available in different lengths and because of the low stretch it is not possible to supply with eye splices or stitched eyes.

- Diameter: 11.5mm
- Materials / construction: 32-strand Polyester sheath with X-Braid Polvamide core
- Static resistance: 30kN
- Resistance with figure of 8 knot:
- Mass per meter: 91gram
- Sheath percentage: 43% • Sheath slippage: 0.2%
- Elongation 50 / 150Kg: 2%
- Knotability: 0.74
- Retraction with water: 1.5%

#### Reference: Red MJ100RZC+++ Yellow MJ100JZC+++

Certification: CE EN1891-A

# **EXTREMA**

#### **NEW GAME, NEW FAME**

We have updated one of our former best-selling 32-strand caving & speleology ropes called the Equirial. We mainly reduced the stretch, gave it a modern style and a high visibility colour combination...and on top of that a far better international name to gain new appeal to a wide audience of rope access enthusiasts! The improved stretch of the Extrema is a huge benefit on jobs requiring long lengths of working rope, where the proven (it was already inside the Equirial rope) X-Braid parallel core technology gives the rope its long lasting flexibility. Available in different lengths with one or two stitched eyes.

#### 10.5mm

- Materials / construction: 32-strand Polyamide sheath with
- X-Braid Polyamide core
- Static resistance: 32kN • Resistance with stitched eye:
- Mass per meter: 69gram
- Sheath percentage: 41%
- Sheath slippage: 0.2%
- Elongation 50 / 150Kg: 2.5%
- Knotability: 0.63
- Retraction with water: 4.5%
- Reference: MM8+++++

- Materials / construction: 32-strand Polyester sheath with X-Braid Polyamide core
- Static resistance: 33kN · Resistance with stitched eye:
- Mass per meter: 72gram Sheath percentage: 40%
- Sheath slippage: 0.1%
- Elongation 50 / 150Kg: 2.7% • Knotability: 0.71
- Retraction with water: 4%


Reference: ML8+++++

Certification: CE EN1891-A














# **PHOENIX**

#### **CLOSE YOUR EYES AND MAKE A HITCH**

The Phoenix has been developed for tying different kinds of hitches and works as the perfect brake on arborist climbing ropes. The sheath of this cord is manufactured from the latest generation aramid fibres which are highly resistant to heat, wear and UV radiation. The Phoenix is available in 8mm or 10mm diameter as a lanyard with 2 stitched eyes from 65cm up to 110cm, and for different applications we also have the Phoenix available in 100 & 200m rope boxes. At the start of 2020 we replaced the traditional heat shrink tube with a molded polymer end protector as a finishing touch.

- Diameter: 8mm & 10mm
- Materials: Polyamide / Polyester / Aramid
- Colour: green / black
- Static resistance: 8mm 18kN / 10mm - 22kN
- · Resistance with stitched eyes: 8mm - 12.5kN / 10 mm - 18kN

#### Reference:

65cm length: MNKNL65C 70cm length: MNKNL07C 75cm length: MNKNL75C 80cm length: MNKNL08C 85cm length: MNKNL85C 90cm length: MNKNL09C 100cm length: MNKNL10C 110cm length: MNKNL11C 100m rope box: MNKNLC100 200m rope box: MNKNLC200

#### 65cm: MPKNL65C

70cm: MPKNL07C 75cm: MPKNL75C 80cm: MPKNL08C 85cm: MPKNL85C 90cm: MPKNL09C 100cm: MPKNL10C 110cm: MPKNL11C 100m rope box: MPKNLC100 200m rope box: MPKNLC200

# **ELLIPSE ROPE SLINGS**

#### BY PHOENIX

tree.

Inspired by webbing slings, these endless rope slings offer increased abrasion resistance with their aramid fibre sheath. Manufactured from 8mm Phoenix hitch cord, where each sling size has its own colour code for easy recognition. It is the perfect solution for traditional "footlock" techniques or to create a temporary anchor in the

Certification: CE EN795-B (only as a lanyard)

- · Diameter: 8mm
- Materials: Polyamide / Polyester / Aramid
- Static resistance: 22kN

40cm - black: PPLSARN4 60cm - orange: PPLSAR06 80cm - blue: PPLSAR08 120cm - yellow: PPLSAR12 150cm - red: PPLSAR15 200cm - black: PPLSAR20

Certification: CE EN566 & EN 795-B

# **ACCESSORY CORD**


For all kinds of applications we produce a complete range of flexible and highly abrasion resistant Polyamide accessory cords. Available in different diameters and many vibrant colours.

- 2mm diameter 1kN static resistance - Grey - 100m Reference: MB1CHB00100
- 3mm diameter 1.9kN static resistance - Purple - 100m Reference: MA1CGB00100
- 4mm diameter 4.2kN static resistance - Yellow - 100m

Reference: MC1CAB00100

- 5mm diameter 7kN static resistance - Blue - 100m Reference: DF50NBI0100
- 6mm diameter 9.1kN static resistance - Orange - 100m Reference: MG1CCB00100
- 7mm diameter 12.1kN static resistance - Red - 100m Reference: MT1CDB00100
- 8mm diameter 17.7kN static resistance - Green - 100m Reference: MN1CFB00100

Complies with: CE EN564

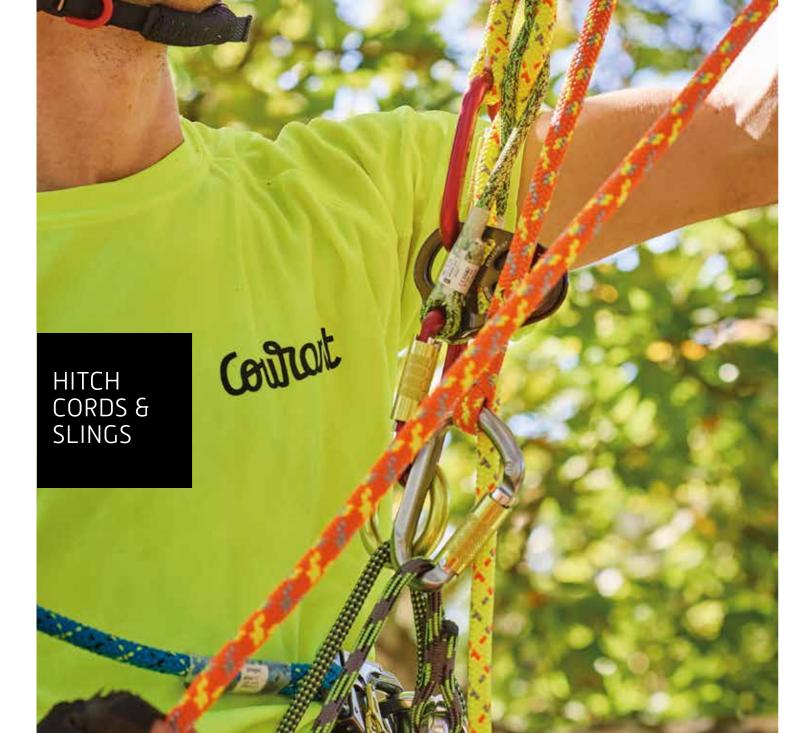









# **SYNCHRO FRICTION SAVER**

Manufactured with a rigid and wide strap to avoid twisting and facilitate easy recovery. The rings are forged in an aluminium alloy which provides better resistance to abrasion and impact. The direction of the strap can be identified from the ground as a result of colour coded ends. Available in 3 lengths.

Certification: CE EN795-B

- Static resistance 22kN
- 90cm length Reference: REL0FF09A • 110cm length Reference: RELOFF11A • 130cm length Reference: RELOFF13A

# **FERLETTE BALL**

Small wooden rotating ball with a polyester rope attached. For recovering friction savers with standard rings.

- Diameter: 30mm
- · Colour: neon yellow • Weight: 11gram

Reference: RELOBFYA

Supplied in a pack of 5.

# **ELLIPSE WEBBING SLINGS**

Made from heavy wear resistant and anti-UV treated webbing. These slings enable the creation of a reliable anchor point. The two surfaces have different colours to alert the user to any twisting of the sling in use.

Static resistance 22kN

Certification: CE EN566 and EN 795-B

- 40 cm / Black
- Reference: PPLSAC04A
- 60 cm / Orange Reference: PPLSAC06A
- 80 cm / Blue
- Reference: PPLSAC08A • 120 cm / Yellow
- Reference: PPLSAC12A • 150 cm / Red Reference: PPLSAC15A
- 200 cm / Black
- Reference: PPLSAC20





# **STILEO WIRE CORE LANYARD**

This 12mm diameter adjustable wire core lanyard is especially developed for tree removal operations. The robust 16-strand polyester sheath (same construction as the Kanopa) gives the Stileo a comfortable grip, and the special 6mm stainless steel wire core gives it its remarkable flexibility. The direction of use is reversible to ensure even wear, and if necessary the lanyard can be fully replaced thanks to the easy removable metal adjuster. Available in 3 lengths with different hardware options.

**Certification CE EN358** 

#### VERSIONS



• With Courant swivel karabiner, adjuster and Axxis TL karabiner 3m: Reference: LACG30BE

4m: Reference: LACG40BE 5m: Reference: LACG50BE



With Courant adjuster and 2x Axxis TL karabiner

3m: Reference: LACG30BB 4m: Reference: LACG40BB 5m : Reference: LACG50BB



• With Courant swivel karabiner

3m : Reference: LACG30SE 4m : Reference: LACG40SE 5m : Reference: LACG50SE



• With 2 eyes (without hardware) 3m : Reference: LACG30SB

4m : Reference: LACG40SB 5m : Reference: LACG50SB



With ISC Snapo Twist, Courant adjuster and Axxis TL karabiner

3m: Reference: LACG30BS 4m: Reference: LACG40BS 5m : Reference: LACG50BS

Replaceable adjuster for the Stileo lanyard Reference: RBL9BLCO


# **LOCKER CLAMPING SYSTEM**

Clamping system for the Stileo reinforced lanyard. This system combined with the Stileo provides extra support for the climber in case of a wet & slippery surface of the tree trunk. It adapts easily to all tree trunk sizes.

- Rope diameter: 8mm Length: 50cm
- Weight: 150gram

Reference: RELOSLAA



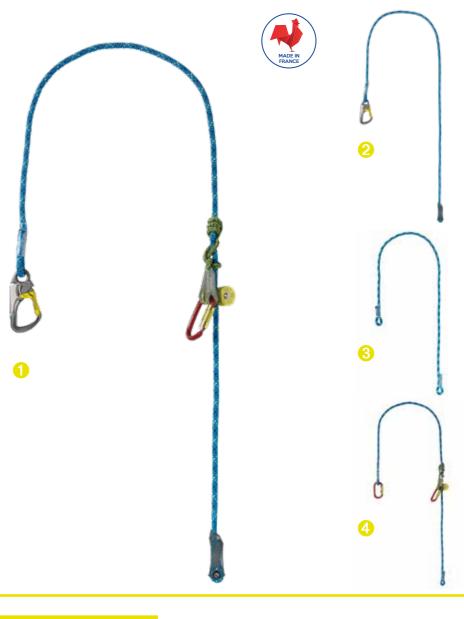

# **FLEXBEE FLEXIBLE LANYARD**

This adjustable rope lanyard is perfectly suited for moving around and securing yourself in the trees. The 11.5mm diameter rope is manufactured from 100% polyamide. The 32-strand sheath offers excellent grip while the X-Braid parallel core technology gives it its lasting flexibility. Adjustment is by means of a hitch cord with pulley system.
Available in 4 lengths
with triple lock captive eye snap hook connector or standard

Axxis TL karabiner. It is With ISC Snapo, Phoenix possible to replace each individual item of this lanyard.

Certification CE EN358

8mm lanyard, pulley and Axxis TL karabiner

Reference: LBBG30PS

Reference: LBBG40PS

• 5m Reference: LBBG50PS

• 7m Reference: LBBG70PS

# With ISC Snapo

Reference: LBBG30SS

Reference: LBBG40SS

Reference: LBBG40SB Reference: LBBG50SS

Reference: LBBG50SB

Reference: LBBG70SB

With 8mm Phoenix lanyard, pulley and 2x Axxis TL karabiner

Reference: LBBG70SS


Reference: LBBG30PM

Reference: LBBG40PM

Reference: LBBG50PM

Reference: LBBG70PM





Reference: LBBG30SB













# TREEZ-LINE

Treez-line is constructed of a blend of Dyneema® yarn for its lightness and good resistance, where a monofilament gives it its rigidity to prevent it from tangling. A smooth throw line with excellent ability to glide over tree branches.

- Length: 60m
- Diameter: 1.8mm
- Static resistance: 0.70kN Reference: MBZRWB60
- Length: 200m
- Diameter: 1.8mm
- Static resistance: 0.70kN
- Reference: MBZRWB200

# **TREEZ THROW BAG**

Throw bag guaranteed leadfree. It is compact enough to pass through narrow forks. its flat D-carabiner prevents the knot from coming undone unexpectedly. Clearly marked to allow quick and easy identification of the weight of each bag. Updated in 2019 to improve its visibility in the trees.

- Weight: 250gramColour: Blue / Black
- Reference: PSALBK25A
- Weight: 300gramColour: Green / Black
- Reference: PSALBK30A
- Weight: 350gram
- Colour: Red / Black
- Reference: PSALBK35A

# **POP LINE**

Bag for storing throw line and to prevent it from tangling. Thanks to a simple buckle system, it folds and unfolds with ease. The cover opens in a single movement, two inner pockets can store throw bags and its vented cover material will allow wet throw lines to dry.

#### **KEY FEATURES**

- Ergonomic carrying handle
  6-point gear holder
  Flap with two transparent pockets (top and bottom)
- Adjustable straps
- PVC-free coated fabric
- Reinforced bottom
- Air vents

Size S

• Diameter: 32 x 27cm • Weight: 0.72kg

• Colour: Black

Reference: PSPOPSBKA Size L

• Diameter: 40 x 27cm

• Weight: 0.95kg

· Colour: Flash Lemon

Reference: PSPOPGBYA















**SNAPO TWIST** 



GECKO



**GATOR** 

# **ODIN**

After 3 years of constant fine tuning we are proud to announce the new version of the Olik openable ring which answers to the name; Odin! It is made from high resistant stainless steel and the size and certification allows the connection of a large number of pieces of equipment in different sizes and setups. It opens like a normal karabiner but in a sideways direction, and together with the special designed keylock gate it assures minimum force is applied onto the locking screw. The screw has a spring ball system with a thread lock to securely fix the gate before use.

**Certification CE EN362** 

- Outside diameter: 75mm
- Inside diameter: 47mm
- Gate opening: 18mm
- Weight: 130gram • Static resistance: 25kN

Reference RMQXANOD

# **SNAPO**

Courant by ISC aluminium captive eye snap hook designed for use on the end of a lanyard. The triple lock gate is easy to operate single handedly.

#### **Certification CE EN362**

- Length: 141mm
- Width: 70mm
- Gate opening: 22mm
- Weight: 134gram
- Static resistance: 27kN Reference: RMQIH903A

# **GECKO**

ISC aluminium medium size triple lock karabiner.

#### **Certification CE EN362**

- · Length: 115mm
- Width: 75mm
- Gate opening: 21mm Weight: 86gram
- Static resistance: 25kN

Reference: RMQI02BK

# **SNAPO TWIST**

Courant by ISC aluminium triple lock snap hook with a swivel and specially designed for use at the end of a reinforced lanyard.

#### **Certification CE EN362**

- Length: 195mm Width: 70mm
- · Gate opening: 22mm • Weight: 198gram
- Static resistance: 27kN
- Reference: RMQIH905A

# **GATOR**

ISC aluminium small size triple lock karabiner.

#### **Certification CE EN362**

- Length: 105mm
- Width: 65mm
- Gate opening: 15mm Weight: 47gram
- Static resistance: 25kN

Reference: RMQI01BK





















# CORE

Courant steel D-shape triple lock karabiner with large opening.

#### **Certification CE EN362**

- · Length: 128mm
- Width: 71mm
- Gate opening: 31mm
- Weight: 321gram
- Static resistance: 60kN

Reference: RM0U2198

#### **VICTO**

Courant steel HMS triple lock karabiner. Ideal for anchoring and rigging.

#### **Certification CE EN362**

- · Length: 110mm
- Width: 67mm
- · Gate opening: 21mm · Weight: 234gram
- Static resistance: 50kN

Reference: RMQUS958

# **VECTOR TL**

Courant aluminium HMS triple lock karabiner with large opening.

#### **Certification CE EN362**

- Length: 113mm
- Width: 74mm
- Gate opening: 23mm
- Weight: 97gram
- Static resistance: 22kN

Reference: RMQK786CA

## **AXXIS**

Courant Zicral (zinc aluminium alloy) oval screw gate karabiner. It is fitted with a locked indicator.

#### **Certification CE EN362**

- Length: 110mm
- · Width: 62mm
- · Gate opening: 21mm
- Weight: 75gram

 Static resistance: 24kN Reference: PPLSMQSY

# **AXXISTL**

Courant Zicral (zinc aluminium alloy) oval triple lock karabiner.

#### **Certification CE EN362**

- Length: 110mm
- · Width: 62mm • Gate opening: 21mm
- Weight: 82gram
- · Static resistance: 24kN

Reference: RMQUAXTL

## **MOKA**

Courant aluminium delta-ring shape triple lock karabiner. It is strong, light, easy to use and connects the two chest attachment points of a full body harness. It is specifically designed to allow the rope or webbing loop to positioning itself in the correct orientation.

#### **Certification CE EN362**

- Length: 113.5mm
- Width: 75mm
- · Gate opening: 18mm
- Weight: 130gram
- Static resistance: 20kN

Reference: RMQCMOKA

# ORBIT 22

Courant aluminium pulley with fixed side plates.

#### **Certification CE EN12278**

- Length: 85mm
- Width: 44mm
- Weight: 85gram Static resistance: 22kN
- Maximum rope diameter: 13mm

Reference: PPLSPLJF

# **MOVA**

Courant aluminium pulley with rotating side plates.

#### **Certification CE EN12278**

- · Length: 73mm
- Width: 43mm
- Weight: 85gram
- Static resistance: 20kN · Maximum rope diameter: 11mm

Reference: RPL92142

# **PHLOTICH PULLEY**

This Courant by ISC aluminium pulley is ideally suited for SRT and DRT climbing techniques in numerous configurations. The unique kidney shaped design allows karabiners to self-center according to where the load is applied. The holes are large enough for a karabiner to completely rotate and also reduce the risk of side loading. The two rotating side plates are colour coded to easily identify the orientation of the pulley.

#### **Certification CE EN12278**

- Length: 97mm
- Width: 69mm
- Weight: 145gram
- Static resistance: 32kN

· Maximum rope diameter: 13mm

Reference: RPLIP282FL

# **ROPE WRENCH KIT**

The ISC Rope Wrench is an aluminium friction device that allows the climber to ascend, descend and work in the tree using SRT climbing techniques. It allows the climber to smoothly control the rate of descent by adding friction onto the climbing system. A rigid tether enables the Rope Wrench to be in the optimum position. The rope wrench is compatible with CE EN1891 ropes up to 13mm diameter.

**Certification CE EN12278** 

#### Available in 6 colours

- · Single tether kit Red - Reference: RPLIKRWRD Grey - Reference: RPLIKRWGR Purple - Reference: RPLIKRWPU Black - Reference: RPLIKRWBK Yellow - Reference: RPLIKRWYE Orange - Reference: RPLIKRWOR
- Double tether kit Red - Reference: RPLIKRW2RD Grey - Reference: RPLIKRW2GR Purple - Reference: RPLIKRWPU Black - Reference: RPLIKRW2BK Yellow - Reference: RPLIKRW2YE Orange - Reference: RPLIKRW2OR

# Mounted on the Squir

Single tether

Double tether



# **EVO CHEST ASCENDER**

The CT Evo aluminium chest ascender is light and compact and a perfect tool for access on ropes when combined with the right harness. The springloaded lever can be activated in a simple downwards movement, even while wearing gloves. The body of the ascender has been manufactured from aluminium and the cam and lever are manufactured from stainless steel for increased durability. The Evo has good grip (even with low loads) on wet and/or greasy ropes.

#### **Certification CE EN12841**

- Rope diameter: 10-13mm
- Static resistance: 6kN

Reference: 2BLCTB1N



# STRYDER FOOT ASCENDER

The ISC Stryder aluminium foot ascender was developed to make climbing on ropes a lot easier. It provides smooth upwards movement on the rope, and can be opened and closed with use of the other foot. The foot strap is reinforced and it comes in right or left foot version.

- Rope diameter: 8-13mm
- Static resistance: 2.5kN
- · Working load limit: 140kg

Reference: RBLI227A (right foot) Reference: RBLI228A (left foot)









# **PLATFORM SAFETY KIT**

CHEROKEE **EOUAS** MOKA

Reference: RELOLT04

# **CHEROKEE**

The Cherokee polyamide full body harness is simple to adjust and adapts to all sizes. The user can connect themselves to the sternal or the dorsal attachment point.

**Certification CE EN361** 

Reference: PPLSHRSG+

#### **AVANTAGES**

- Non slip aluminium buckles
- · Large sternal attachment
- Dorsal attachment
- Downwards strap adjustment
- One size fits all

# **EOUAS**

M'fix terminations on this lanyard guarantee maximum safety, and it is supplied as standard with a double lock snap hook for easy connection.

- Length: 135mm
- Width: 70mm
- · Gate opening: 25mm
- Weight: 125gram Static resistance: 30kN

**Certification CE EN354** 

Reference: LSTR10B0

# **MOKA**

Courant aluminium deltaring shape triple lock karabiner. It is strong, light and easy to use and connects the two chest attachment points of a full body harness. It is specifically designed to allow the rope or webbing loop to position itself in the correct orientation.

- Length: 113.5mm
- Width: 75mm
- Gate opening: 18mm • Weight: 130gram
- Static resistance: 20kN

**Certification CE EN362** 

Reference: RMQCMOKA



# BAGS





**CROSS PRO** FRESH BLUE - OPEN



**CROSS PRO FAMILY** 

FRESH BLUE **RESCUE RED** FLASH LEMON TACTICAL BLACK



**CROSS PRO XL RESCUE RED - OPEN** 



# **CROSS PRO 54L**

The Cross Pro bag is the perfect solution to store and transport your precious equipment. It has the unique feature of totally opening up, to give you an overall view and full access to all your gear. The ergonomic shoulder straps and padded back make the Cross Pro also very comfortable to wear, and it comes in four exciting colour combinations.

#### **KEY FEATURES**

- Pack size: 54L
- Dimensions: 76x32x25cm
- · High-resistance fabric 1680 D • Heavy duty YKK zip closure & Velcro straps
- · Bags from the Cross range can be attached to the front of the shoulder straps using special buckles

#### INTERIOR

- 6 modular mesh compartments at the sides
- The use of pop fasteners allows pockets to be made large or small • Identification of pockets by
- pictogram style labels Storage can be customized as you
- 20 karabiner attachment points • 2 adjustable buckle straps for
- securing ropes or a harness
- · 1 organiser panel with elasticated
- 2 semi-transparent pockets for documents
- 1 mesh compartment reachable by external zipper for your phone or other more fragile items

#### **EXTERIOR**

- 6 karabiner attachment points
- 4 high-resistance retainers (including two on the shoulder
- 1 transparent pocket for documents and/or identification

- 1 helmet fastening kit, which also works for a helmet with visor & ear protection
- Padded back and adjustable padded shoulder straps for maximum comfort when transporting
- Option of adding the Cross Belt to the bag in order to distribute the weight on the body

#### PORTABILITY

- Comfortable and adjustable padded shoulder straps
- Two side handles (200kg resistance)
- Two central handles (200kg resistance)
- One back handle (200kg resistance)
- 1 Heli hoisting loop (300kg resistance)

#### COLOURS

- Flash Lemon
- Reference: PSCPBYA
- · Rescue Red
- Reference: PSCPRDB
- Fresh Blue
- Reference: PSCPBLC • Tactical Black
- Reference: PSCPFBA

# **CROSS PRO XL 75L**

Following huge international demand, we have developed a new bag based on the revolutionary Cross Pro design but with even more storage space! Just like the Cross Pro, the XL version transforms into a quick to access highly organized equipment storage & transport bag. The Cross Belt allows the weight to be better distributed on the body for more comfort and comes standard with the Cross Pro XL. Currently available in Rescue Red.

#### **KEY FEATURES**

- Pack size: 75L · Dimensions: 88x36x27cm
- High-resistance fabric 1680 D
- Heavy duty YKK zip closure & Velcro straps
- Bags from the Cross range can be attached to the front of the shoulder straps using special buckles

#### INTERIOR

- 6 modular mesh compartments at the sides
- The use of pop fasteners allows pockets to be made large or . small
- · Identification of pockets by pictogram style labels
- Storage can be customized as you wish
- 29 karabiner attachment points • 2 adjustable buckle straps for
- securing ropes or a harness · 1 organizer panel with elasticated webbing
- 2 semi-transparent pockets for documents

- 1 mesh compartment reachable by external zipper for your phone or other more fragile
  - · Elasticated straps for holding different tools (for instance a hand saw)

#### **EXTERIOR**

- 5 karabiner attachment points
- 4 high-resistance retainers (including two on the shoulder straps)
- 1 transparent pocket for
- documents and/or identification • 1 helmet fastening kit, which also works for a helmet with visor & ear protection
- Padded back and adjustable padded shoulder straps for maximum comfort when transporting
- 2 foldable pockets with elastic straps for water bottles or other items
- · 1 reinforced pocket for glasses or phone storage

#### **PORTABILITY**

- Comfortable and adjustable padded shoulder straps
- · 2 side handles (200 kg
- resistance) • 2 central handles (200 kg resistance)
- 2 back handles (200 kg
- resistance) • 1 Heli hoisting loop (300 kg
- resistance)

#### COLOURS

• Rescue Red

Reference: PSCPRDXL











# **CROSS ROPE**

The Cross Rope incorporates another unique rope bag design. The height can be adjusted according to the required volume of rope. It can comfortably be carried on your back or attached to the Cross Pro, the Cross Pro XL or the Dock by connecting it to the buckles on the shoulder straps. It comes in two vibrant colour combinations.

#### **KEY FEATURES**

- Pack size: 23L to 35L (expandable)
- · Weight: 930gram
- Dimensions: (45+20)x32x19cm
- High-resistance fabric 1680 D
- · Heavy duty YKK zip closure on the bottom and top
- Can be opened at both the top and bottom making it possible to change volume in seconds
- · Can be attached to bags from the Cross range by the special buckles on the shoulder straps

#### OTHER FEATURES

- 6 karabiner attachment points
- Opening with YKK zipper for
- rope at the top
- · Webbing with Velcro to attach
- the rope inside at the bottom
- Various carrying handles
- Mesh panels to allow ropes to dry

#### COLOURS

• Flash Lemon Reference: PSCRBYA

> Tactical Black Reference: PSCRFBA

# **DOCK**

The Dock is a robust and comfortable equipment storage & transport bag designed with a clever system which allows the user to adapt it to the volume required. This is achieved by rolling the top of the bag and then closing the buckle, or the other way around to allow quick access to the inside of the bag. It comes in three exciting colour combinations.

#### **KEY FEATURES**

- Pack size: 60L
- Weight: 1.6kg
- Dimensions: 82x32x25cm
- High-resistance fabric 1680 D
- Heavy duty YKK zip closure & rolling top with buckle
- Bags from the Cross range can be attached to the front of the shoulder straps using special buckles

#### INTERIOR

- 1 large main storage space
- · Stiffened back and 2 stiff straps
- to keep it standing up
- 3 karabiner attachment points
- •1 small semi-transparent document pocket

#### **EXTERIOR**

- 10 karabiner attachment points
- 2 equipment loops
- 2 foldable pockets with elastic straps for water bottles or other items
- 1 semi-transparent pocket for
- identification Various carrying handles
- Ventilation point

#### COLOURS

• Flash Lemon

Reference: PSAMBYA • Rescue Red Reference: PSAMRYA

Tactical Black

Reference: PSAMFBA















# **CARGO**

This simple but very robust bag is highly resistant to friction and tear. The bottom is reinforced and has ventilation points. The flap has two transparent pockets with Velcro closing and it comes in three eye-catching colour combinations.

#### **KEY FEATURES**

- Pack size: 40L / 50L
- Dimensions 40L: 48x30x28cm
- Dimensions 50L: 56x30x28cm • Highly resistant to friction and
- tear material
- Ergonomic carrying handle
- · 6-point gear holder

# • Size: 40L

- · Colour: Yellow Reference: PPLSSC42
- Size: 50L
- Colour: Blue

Reference: PPLSSC75

• Size: 50L

· Colour: Red

Reference: PSCCAR5A

# **HOST**

This bag has been designed for the storage and transportation of ropes. It can contain 60m of climbing or access rope and 45m of rigging rope. Ropes can be stored even when wet thanks to the generous ventilation panels. It is equipped with stiffeners which maintain the bags shape even when empty, which makes smooth rope handling possible.

#### **KEY FEATURES**

- Pack size: 36L
- · Weight: 910gram
- Dimensions: (35+25)x32x25cm

- High-resistance fabric 1680 D
- Heavy duty fabric with toggle closing system on the top
- Can be attached to bags from the Cross range using the special buckles on the shoulder straps

#### OTHER FEATURES

- 8 karabiner attachment points
- 4 separate gear loops
- · Expandable pocket on the
- Webbing with Velcro to attach the rope inside at the bottom
- Transparent pocket for
- paperwork or identification
- · Removable shoulder strap for carrying
- Mesh panels to allow ropes to

#### Colour

• Flash Lemon Reference: PSECBYA

# **CROSS ROPE LIGHT**

This lightweight bag can hold 80m of 10.5mm rope. It can be attached to the inside of the Cross Pro and Cross Pro XL bags. Because half the bag is manufactured using mesh material it allows wet ropes to dry quickly.

#### **KEY FEATURES**

- Opens on both ends Side carrying handle
- · Half mesh for better ventilation

#### Colour

• Black

Reference: PPLSSCLCE

# **CROSS BELT**


The Cross Belt is a wide padded waist belt which can be purchased separately. It helps to distribute the load on the body for greater comfort. The Cross Belt can be attached to the Cross Pro and the Dock bags. It comes as standard on the Cross Pro XL.


#### Colour

• Black

Reference: PPLSCRBE

# LOWERING

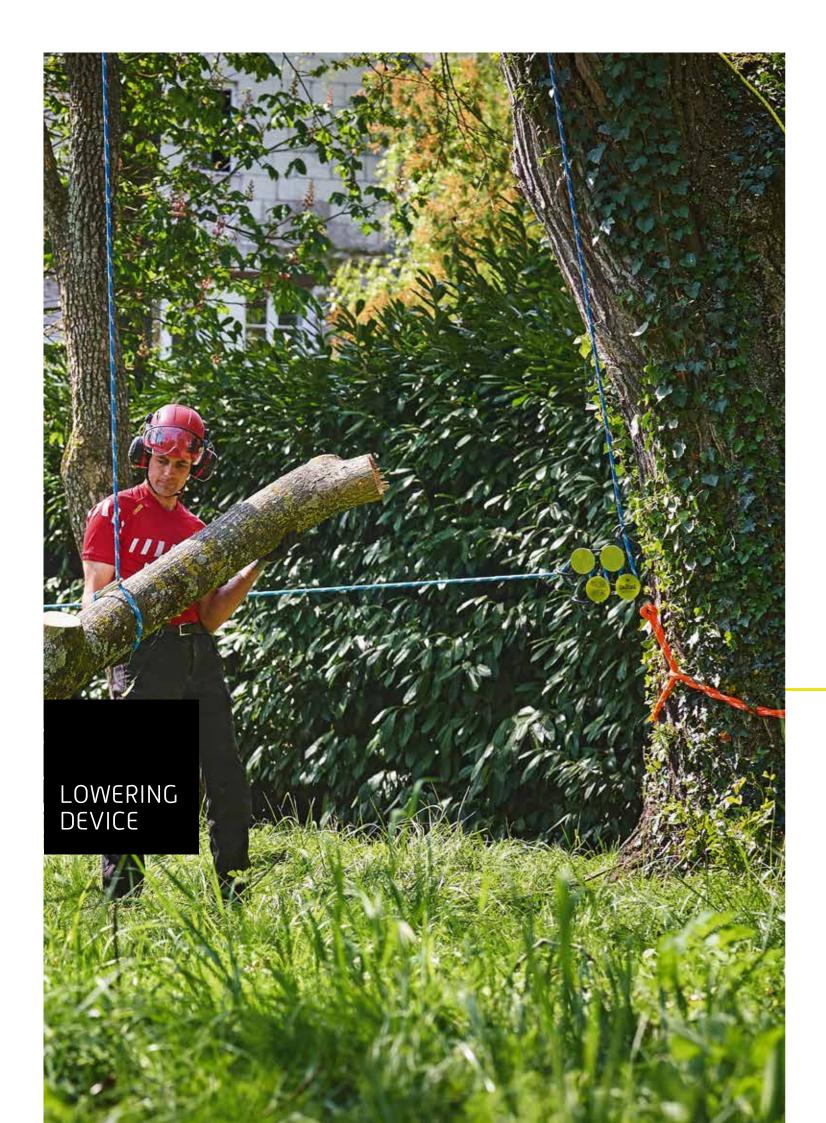

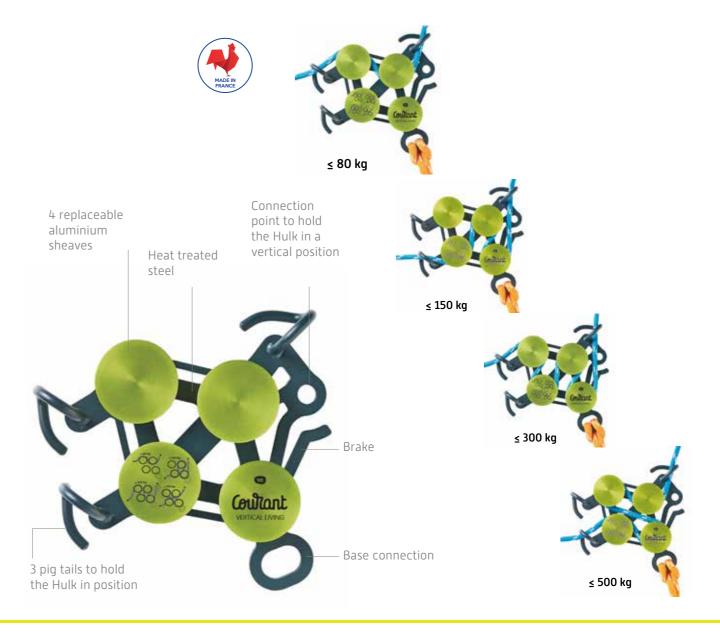

# HULK

The Hulk is an innovative floating lowering device designed to improve your lowering capabilities.
The steel frame makes it robust and hard wearing, where the aluminium sheaves minimize rope wear and therefore wear and therefore increase the life of your rigging ropes. Using different setup options you can easily adjust the friction on the rope according to your needs, It can accommodate loads from 10kg to a maximum working load limit of 500kg.


#### **KEY FEATURES**

- Easy to handle, robust and innovative
   Smooth, controlled descent of branches and logs
   Can handle loads ranging from
- 10 to 500kg
   Eliminates rope twist and rope
- on rope wear

   The sheaves can be turned to
- evenly distribute the wear and are fully replaceable

- Static resistance: 25kNWorking load limit: 5kNMaximum rope diameter: 14mm

Reference: RELOFRHA

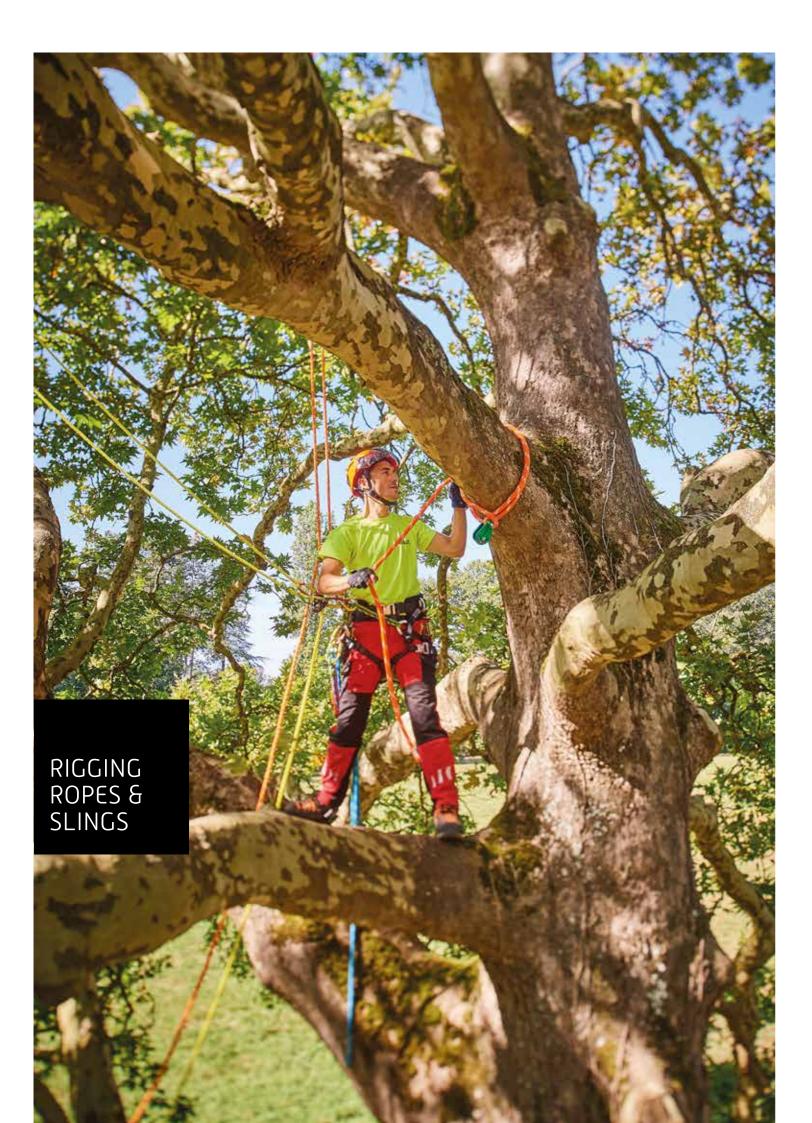

















# **MAONA**

The 24-strand polyester double braid Maona rigging ropes have been specifically designed for all kinds of rigging and lowering opera-tions, where smooth running through lowering devices and rigging pulleys, without the rope gaining to much torsion is important. Splicing is easily achieved because of the double braid construction. In order to easily identify the right rope for your job each diameter has its own specific colour.

- Diameter: 12mm
- Colour: Blue
- Mass per meter: 112gram
- Static resistance: 40kN • Working load limit: 5.7kN

#### Reference: MHD++RBC++

- Diameter: 14mm
- Colour: Green
- Mass per meter: 137gram
- Static resistance: 50kN
- Working load limit: 7.15kN

#### Reference: MXD++RLC++

- Diameter: 16mm
- Colour: Orange
- Mass per meter: 184gram
- Static resistance: 60kN Working load limit: 8.5kN

Reference: MYD++RCC++



Splice

# **YAGAN SLING**

A versatile rigging sling made from Maona rope. Available in several diameters and a number of standard lengths. These slings are used to connect lowering devices and pulleys with a suitable

#### hitch, firmly onto the branch or base of the

#### tree.

- Available in 12, 14, and 16mm diameter, in 3 and 4m length
- 16mm diameter is also available in 5m length

Reference : RELOEL+++

# **SOUNA SLING**

A versatile hollow braid sling suited for rigging or rope redirection in combination with a pulley or karabiner. The sling has a large loop on one end and a small one on the opposite end.

- Length: 130cm
- Static resistance: 16kN
- Working load limit: 10kN

Reference: REL0EV13 Supplied in a pack of 5

# CORE

Courant steel D-shape triple lock karabiner with large opening.

Certification CE EN362

- Length: 128mmWidth: 71mm
- Gate opening: 31mm
- Weight: 321gram
- Static resistance: 60kN

Reference: RMQU2198

# **VICTO**

Courant steel HMS triple lock karabiner. Ideal for anchoring and rigging.

Certification CE EN362

- Length: 110mm • Width: 67mm
- Gate opening: 21mm Weight: 234gram
- Static resistance: 50kN

Reference: RMQUS958









# **BLOCKBUSTER COMPACT**

The ISC Blockbuster Compact offers an impressive strength to weight ratio. The side plates are made from hot forged aluminium which gives this compact pulley such great strength and load bearing capacity. The pulley is ideally suited for small rigging operations.

Certification: CE EN12278

- Max rope diameter: 13mm Max sling diameter: 16mm
- Length: 125mm Width: 76mm
- Rigging sling diameter: 14 to
- Rigging rope diameter: 12mm
- Colour: Green

- Weight: 490gram
  Static resistance: 85kN
  Working load limit: 17kN

Reference: RPLIP048

# **BLOCKBUSTER SMALL**

The ISC Blockbuster Small The ISC Blockbuster Small is manufactured from high quality materials and using hot forged aluminium technology. This method of manufacture ensures an extremely robust and durable pulley perfectly capable of withstanding high impact forces. The rounded edges are not only aesthetically are not only aesthetically pleasing but also kind to your rigging ropes.

Certification: CE EN12278

- Max rope diameter: 16mm Max sling diameter: 25mm
- Length: 190mm
- Width: 99mm
- Rigging sling diameter: 16 to
- Rigging rope diameter: 14 to
- Colour: Red

- Weight: 1490gram
   Static resistance: 100kN
   Working load limit: 20kN

Reference: RPLIP051

# **BLOCKBUSTER MEDIUM**

Same as the ISC Blockbuster Small pulley but bigger in size & capacity.

Certification: CE EN12278

- Max rope diameter: 19 mmMax sling diameter: 29 mmLength: 230mm
- Width: 124mm
- Rigging sling diameter: 20mmRigging rope diameter: 16 to

- Colour: Blue

- Weight: 2300gram
   Static resistance: 150kN
   Working load limit: 30kN

Reference: RPLIP055

# **SMALL SINGLE PULLEY**

This small ISC aluminium • Static resistance: 40kN single pulley is both lightweight and robust. The pulley wheel runs on a self-lubricated bushing. The wide connector hole allows two karabiners to be attached.

- Maximum rope diameter: 13mm

**Certification CE EN12278** 

Reference: RPLI11BK

# **SMALL DOUBLE PULLEY**

This small ISC aluminium double pulley, is both lightweight and robust. The pulley wheels run on self-lubricated bushings. The wide connector hole allows two karabiners to be attached. The pulley has an additional connection point on the bottom to connect a karabiner and use it in a hauling system.

· Static resistance: 40kN

• Maximum rope diameter: 13mm

**Certification CE EN12278** 

Reference: RPLI12BK

# **HAULING KIT**

Multipurpose 4:1 mechanical advantage lifting and lowering kit. The system comes pre-rigged and ready for use and is supplied in an Airtex bag for easy transportation.

#### **CONTAINS:**

- 2x small double ball bearing pulleys
- 1x 8mm maillon rapide
- 1x Victo steel triple lock karabiner
- 1x Core steel triple lock karahiner • 1x Phoenix 10mm hitch cord
- lanyard 70cm • 1x Bandit 12.5mm diameter rope 12m length with stitched eye
- 1x Airtex bag

Reference: RELOKMOA

# **ROPEGRAB**

This ISC Ropegrab is manufactured from high strength aluminium and has a non-aggressive cam design to prevent rope damage. It has a Pip Pin Axle, allowing the rope grab to be easily and securely attached onto a (working) rope or lanyard at any point. The Pip Pin is a special 'pushbutton' system, which

allows the user to quickly and efficiently secure the device before each use.

• Rope diameter: 10.5 to 13mm

• Weight: 177gram

Reference: RPLIP203

Size L

• Rope diameter: 14 to 16mm

• Weight: 300gram

**Certification CE EN353-2** 

Reference: RPLIP204















# **FLASH CODE BEACON**

These flashing beacons increase your visibility while working on roadsides, especially during early morning, late afternoon and/or bad weather conditions.

#### **KEY FEATURES**

- Highly visible
- · Waterproof, easy to use and maintain
- Shock resistant & crushproof (can withstand being driven over by means of a car)
- Rechargeable using a 220V socket or 12V car cigarette socket
- · Magnetic to attach the beacon to

- Small yellow accessory cord supplied for easy attachment to any object
- · Colour: Green Reference: RLAWFCGR
- · Colour: Red Reference: RLAWFCRD · Colour: Orange
- Reference: RLAWFCOR
- · Colour: Yellow
- Reference: RLAWFCYE · Colour: Blue
- Reference: RLAWFCBL
- Colour: White Reference: RLAWFCWH

# **FLASH CODE CASE**

This carry case can store up to six flash code beacons in which they can be individually recharged using a 220V socket or 12V car cigarette socket.

- · Colour: Green (6x)
- Reference: RLAWFCV1 • Colour: Green (4x) & Red (2x)
- Reference: RLAWFCV2
- · Colour: Red (6x) Reference: RLAWFCV3
- Colour: Blue (6x)
- Reference: RLAWFCV4
- Colour: White (6x)
- Reference: RLAWFCV5
- Colour: Orange (6x)
- Reference: RLAWFCV6
- · Colour: Yellow (6x)





Follow the adventures of the Courant team and our products on Facebook @courantverticalliving Or find us on Instagram @courant\_vertical\_living #courantverticalliving #mycourant #funwithcourant #ropesconnectingpeople

